

# FERABOLI

# ENTRY



 **FIXED CHAMBER ROUND BALER**

*Fixed chamber round baler with chain*

# ENTRY 120 - 150

## FIXED CHAMBER WITH BARS

Mechanical round baler management: simplified work and maintenance operations!



Visit our website



## FERABOLI ROUND BALERS

Feraboli round balers are designed for the maximum flexibility and reliability in any condition. The baling chamber is equipped with a sturdy and reliable chain system. Delicate with premium hay and perfect with moist fodder, also ideal with difficult products such as cornstalks and straw. Long life, high work capacity, perfectly shaped bales, compact and heavyweight: all these features make Feraboli round balers a profitable investment.

# ENTRY 120/150

Sturdy and reliable, easy to use but capable of providing high performance: introducing **ENTRY**, the new Feraboli chain-operated fixed chamber machine: innovative frame with compound structure; newly designed door hinge to further improve coupling of the chain bearing sliding guides; automatic chain tensioner, total pick-up width 1500 mm (2000 optional); high efficiency packer feeder deriving from **EXTREME**.



STRAW



HAY



WIRE  
BINDING



NET  
BINDING



PACKER



## FEED SYSTEM

### ALTERNATIVE PACKER



Ideal for short and dry mulched straw or to harvest delicate short and brittle fodder without damaging it.

## BINDING SYSTEM

Two binding systems available: wire and net.  
The Entry round baler can be equipped with binding devices that are ideal for your work.



TWINE BINDING



NET BINDING



TRANSMISSION DIVIDED ON TWO SIDES



NET AND TWINE ROLL HOUSING



# ENTRY 120/150

## MAXIMUM YIELD

The machine was designed for the user looking for excellent productivity and reliability together with low costs and easy use. High productivity achieved by operating at a fast work pace, with low power absorption. Baling silage, fodder and straw is a demanding task, requiring carefully designed machinery. The baling process must be efficient but delicate on the fodder to compress the product to the right size and density.





# ENTRY 120/150

## TECHNICAL DETAILS

The **ENTRY** model is a machine for small mid-sized farms, suitable for harvesting all types of products. Low price but with excellent performance. The mechanical round baler management simplifies work and maintenance making it easy to use.



BINDER



BALE COUNTER




CHAIN ADJUSTMENT








## PICK-UP

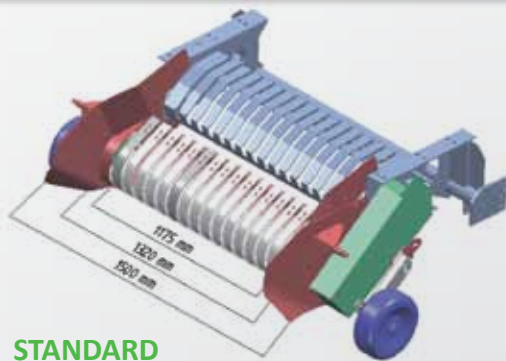

STANDARD

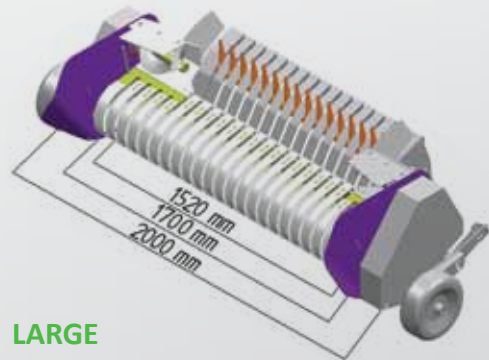

LARGE

## OPTIONALS



BALE EJECTOR

Moves the bale away from the chamber's closing range after unloading it to avoid further manoeuvres to promptly resume work.



AUTOMATIC OILING

Thanks to the Feraboli automatic lubrication system, all the machine's transmission chains are constantly lubricated to lengthen the life and performance of the round baler.

# ENTRY 120/150

## AGILE AND HANDY

Feraboli machines guarantee compact, stable and heavyweight bales, designed to facilitate maintenance and to extend their duration. Driven by a small amount of chains, makes for less energy dispersion and lower power absorption.

**ENTRY** is a highly resistant round baler, designed to be used with low power tractors. The small size allows it to pass through narrow spaces and to work on steep slopes.







CHAMBER	ENTRY 120	ENTRY 150
Diameter	1200 mm	1500 mm
Width	1200 mm	
MACHINE DIMENSIONS		
Length	3560 mm	3760 mm
Width	2510 mm	
Height	2020 mm	2320 mm
Weight	2140 kg	2450 kg
TRACTOR		
PTO	540 min <sup>-1</sup> - 40 hp	540 min <sup>-1</sup> - 50 hp
Hydraulic system	1 double acting socket, 1 single acting socket.	
Electric system	1 7-pole socket 12V	
PICK-UP		
Total harvesting width	1500 mm (2000 mm OPTIONAL)	
Tooth pitch	69 mm	
PACKER		
Type	Alternative comb packer feeder with 16 teeth	
PRESSING		
Type	Hydraulic	
N° chain shafts	33	41
Torque limiter	Bolt	
BINDERS		
Twine	With settings from the cab	
Net	With settings from the cab	
CONTROLS		
Binders	Electric	
Door	Hydraulic	
Pick-up	Hydraulic	
TYRES		
Size	11.5/80 - 15.3	

# FERABOLI

COMPANY WITH QUALITY MANAGEMENT  
SYSTEM CERTIFIED BY DNV  
= ISO 9001:2008 =

**MASCHIO GASPARDO S.p.A.**

Headquarters and production plant  
Via Marcello, 73  
35011 Campodarsego (PD) - Italy  
Tel. +39 049 9289810  
Fax +39 049 9289900  
e-mail: info@maschio.it  
http://www.maschionet.com

## the winning team

DEALER:



**GASPARDO  
UNIGREEN**

# FERABOLI

# TROTTER



## ROTOEMPACADORA CON CÁMARA FIJA

*Rotoempacadora con cámara fija con rodillos*

# TROTTER 125 - 125 CUT - 125 ULTRACUT

## CÁMARA FIJA CON RODILLOS

La **TROTTER** es una máquina polivalente, siempre perfecta y en cualquier lugar: tanto en zonas llanas como en colinas o piedemontes, con todos los tipos de forraje, con paja y hasta con sarmientos (ideal para la gestión de las biomásas).



Visite nuestro sitio de Internet



## ROTOEMPACADORAS FERABOLI

Las rotoempacadoras Feraboli se han diseñado para conseguir la máxima flexibilidad y fiabilidad en cualquier condición. La cámara de prensado está equipada con una serie de rodillos robustos y fiables. Delicadas en el heno de calidad y perfectas en el forraje húmedo, son óptimas también con productos complicados como rastrojos y paja. La duración excepcional, las capacidades de trabajo elevadas, las pajas perfectamente formadas, compactas y de peso notable, hacen de las rotoempacadoras Feraboli una inversión rentable.

# TROTTER 125 - 125 CUT - 125 ULTRACUT

La alta tecnología aplicada para garantizar la máxima capacidad productiva. Resistente, con engranajes y pernos de los rodillos temperados. Fácil de utilizar e idónea para trabajar en cualquier tipo de terreno. Prestaciones elevadas: hasta 50 pajas/hora.



VERDE



PAJA




ESTOQUES



HENO



ATADO  
CON HILO



ATADO CON  
RED



PELÍCULA



EMBOCADOR



CORTE



ULTRACUT



## SISTEMA DE ALIMENTACIÓN

EMBOCADOR ALTERNATIVO



TOPCUT CON 13 CUCHILLAS



ULTRACUT CON 25 CUCHILLAS





## CÁMARA FIJA CON RODILLOS

Capacidad elevada de compresión gracias al sistema de rodillos.  
Disponible también en la versión CUT y ULTRACUT. Eficiencia elevada y productividad hasta 50 pajas/hora.



ATADO CON HILO



ATADO CON RED



ATADO CON PELÍCULA



SISTEMA CON RODILLOS



ATADOR CON HILO, RED Y PELÍCULA



# TROTTER 125 - 125 CUT - 125 ULTRACUT

## MANEJABLE Y PRÁCTICA

La **TROTTER** es una máquina altamente profesional con cámara fija con 18 rodillos. Especialmente idónea para el uso en zonas de montaña o donde es necesaria una paja pequeña pero de peso elevado. En el interior del habitáculo del tractor se encuentra un panel de mandos eléctricos con el que se pueden realizar cómodamente todas las funciones de la máquina.





# TROTTER 125 - 125 CUT - 125 ULTRACUT

## DETALLES TÉCNICOS

Cada uno de los 18 rodillos cuenta con cojinetes heavy-duty, montados en alojamientos de hierro atornillados sólidamente al exterior de la cámara de compresión. Cada rodillo se puede quitar para el mantenimiento, sin tener que desmontar ningún otro componente importante.

La potencia se transmite mediante cadenas con paso de 1" en combinación con carretes de gran diámetro para minimizar el desgaste. Las cadenas se pueden equipar con lubricación constante de aceite.



CÁMARA CON 18 RODILLOS



ATADOR HILO/RED




### EASYTRONIC

La centralita sencilla y fácil de usar, permite variar el diámetro de la paja, la densidad de prensado, el sistema de atado, y todo se visualiza en un amplio monitor gráfico.






## PICK-UP

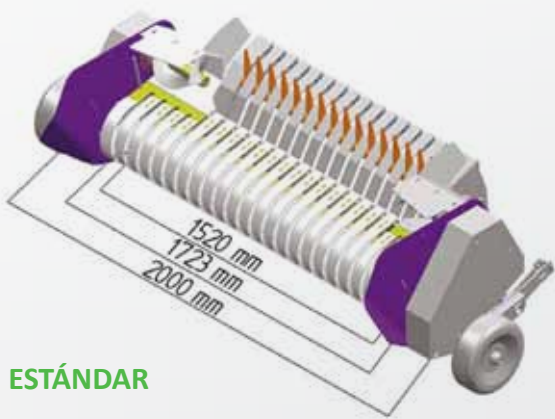

ESTÁNDAR

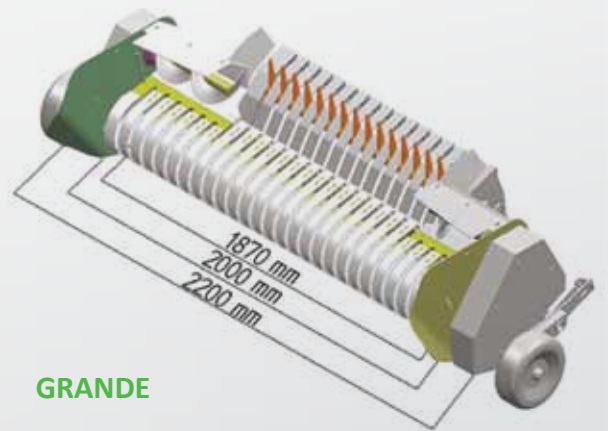

GRANDE

## OPCIONALES



DISTANCIADOR DE PAJAS



ENGRASADO AUTOMÁTICO

# TROTTER 125 - 125 CUT - 125 ULTRACUT

## PREPARADA PARA TODO

Las máquinas Feraboli se utilizan en todo el mundo y en cualquier condición, por lo que deben funcionar perfectamente con paja, heno y ensilado marchito. La fragilidad de la paja y del heno en momentos de sequía y el ensilado húmedo pesado no asustan a nuestras máquinas.







CÁMARA	TROTTER 125	TROTTER 125 TOPCUT	TROTTER 125 ULTRACUT
Tipo		Fija con rodillos	
Envoltura		Nº 18 rodillos	
Compresión	Mecánica con regulación manual, 7 posiciones		
Dimensiones (mm)	1.200 × 1.250		
EMBOCADOR			
Tipo	EmboCADOR alternativo	13 cuchillas	25 cuchillas
DIMENSIONES DE LA MÁQUINA			
Ancho (mm)	2400	2400	2400
Longitud (mm)	3700	3920	3920
Altura (mm)	2050	2050	2050
Peso (kg)	2650	3120	3190
TRACTOR			
PTO	540 min <sup>-1</sup> - 52 hp	540 min <sup>-1</sup> - 65 hp	540 min <sup>-1</sup> - 72 hp
Instalación hidráulica	1 toma de efecto doble, 1 toma de efecto simple		
Instalación eléctrica	1 toma 7 polos 12 V		
EQUIPAMIENTOS ESTÁNDAR			
Pick-up ancho total (mm)	2000 (2200 opcional)		
Elevación	Hidráulica		
SISTEMA DE CORTE "FERABOLI CUT SYSTEM"			
Cuchillas (nº)	-	13	25
Longitud de corte (mm)	-	77	45
Centralita "EASYTRONIC"	Electrónica multifunción		
Atado	Hilo, red		
Neumáticos	11,5-15		
Limitador de par	Bulón		

# FERABOLI

## juntos venceremos

COMPANY WITH QUALITY MANAGEMENT  
SYSTEM CERTIFIED BY DNV  
= ISO 9001:2008 =  
**FERABOLI S.p.A.**

Oficina central y planta de producción  
Via Bredina, 6  
26100 Cremona - Italy  
Tél. +39 0372 564610  
Fax : +39 0372 564625  
e-mail : info@feraboli.com  
http://www.feraboli.com

COMPANY WITH QUALITY MANAGEMENT  
SYSTEM CERTIFIED BY DNV  
= ISO 9001:2008 =  
**MASCHIO GASPARDO IBERICA S.L.**

Planta de producción  
Calle Cabernet nº 10  
Poligono Industrial Clot de Moja  
08734 Olerdola - Barcelona - SPAIN  
Tel. +34 68 7408 008  
e-mail: info@maschio.es  
www.maschio.es

DEALER:



## GASPARDO UNIGREEN